




Kooltherm® K3 Floorboard

INSULATION FOR FLOORS

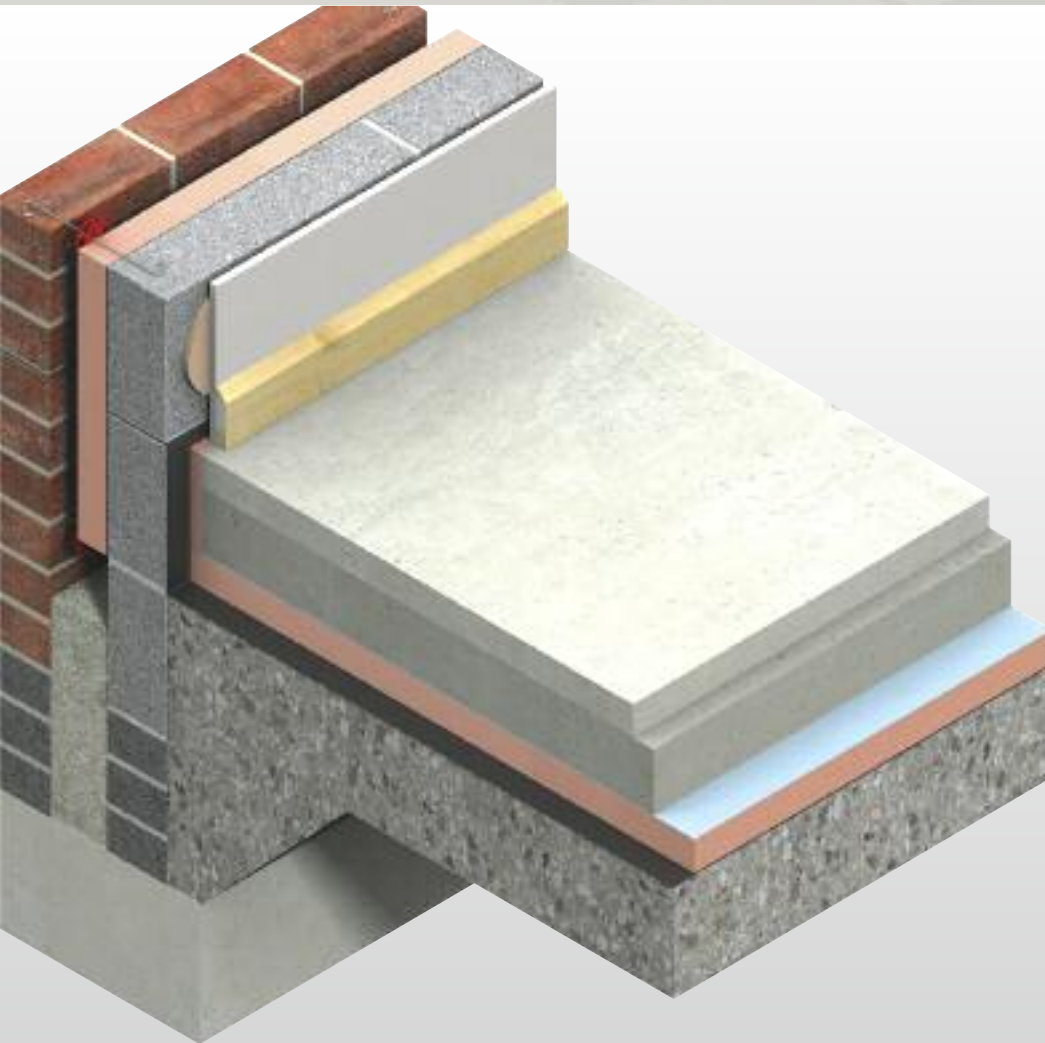

- Premium performance rigid thermoset insulation – thermal conductivities as low as 0.020 W/m-K
- Class 0 fire rating*
- Class 0 fire rated insulation core
- Negligible smoke obscuration
- Can reduce the cost of related items – soil removal, service connections
- Unaffected by air infiltration
- Resistant to the passage of water vapour
- Easy to handle and install
- Ideal for new build and refurbishment
- Non-deleterious material
- Manufactured with a blowing agent that has zero ODP and low GWP

* for product produced at Kingspan Insulation's Pembridge manufacturing facility



Low Energy –
Low Carbon Buildings

Typical Constructions and U-values

Heat Loss and Linear Thermal Bridging

For buildings with relatively small ground floor areas (primarily domestic properties), if the ground floor is left uninsulated, the thermal performance will be poor. To enhance the thermal performance, complete insulation of the ground floor should be adopted (Figures 1 & 3).

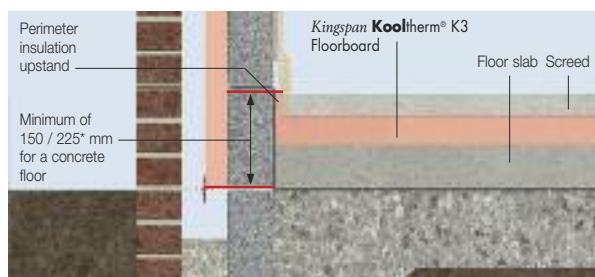


Figure 1 – Complete Masonry Floor Insulation

For buildings with large ground floor areas (primarily non-domestic properties), complete insulation of the ground floor may be unnecessary. Insulating the perimeter in a 1.2 metre wide strip may provide adequate thermal performance (Figure 2).

Calculations in the tables that follow assume complete insulation of the floor area, please contact the Kingspan Insulation Technical Service Department for calculations with perimeter strip insulation only.

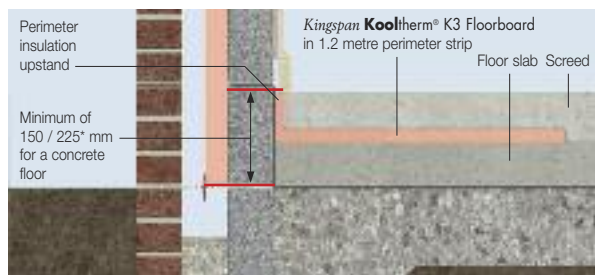


Figure 2 – Perimeter Strip Masonry Floor Insulation

In order to minimise cold bridging at the edge of the floor, the distance between the top of the floor insulation surface or perimeter insulation upstand, and the bottom of the wall insulation must be 150 / 225* mm min. for a concrete floor (Figures 1 & 2) and 200 mm min. for a suspended timber floor (Figure 3).

* 150 mm applies to the UK and 225 mm to the Republic of Ireland.

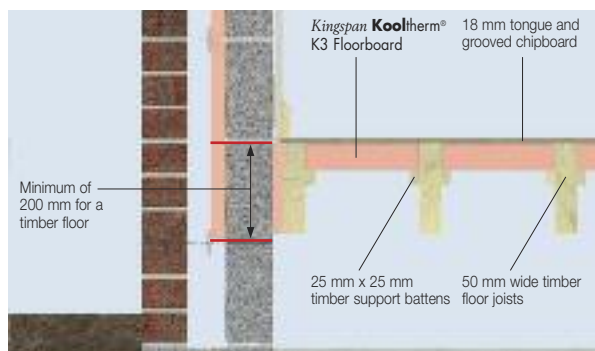


Figure 3 – Complete Timber Floor Insulation

Assumptions

The U-values in the tables that follow have been calculated, under a management system certified to the BBA Scheme for Assessing the Competency of Persons to Undertake U-value and Condensation Risk



Calculations, using the method detailed in BS / I.S. EN ISO 13370: 2007 (Thermal performance of buildings. Heat transfer via the ground. Calculation methods) and using the conventions set out in BR443 (Conventions for U-value calculations). They are valid for the constructions shown in the details immediately above each table.

Unlike roofs, walls and intermediate floors, U-value calculations for ground floors cannot be calculated with reference to the construction detail alone. Heat loss from ground floors depends upon the ratio of the exposed floor perimeter to the total floor area, the thickness of any basement wall and the depth of any basement.

Floor dimensions should be measured between the finished internal surfaces of the external walls. Non-usable heated space such as ducts and stairwells should be included when determining the area of the floor. Unheated spaces outside of the insulated fabric, such as attached garages or porches, should be excluded when determining the area of the floor, but the length of the wall between the heated building and the unheated space should be included when determining the perimeter. The floor dimensions of semi-detached, terraced or other joined premises / dwellings can be taken either as those of the premises / dwelling itself or those of the whole building. Where extensions to existing buildings are under consideration, the floor dimensions should be taken as those of the extension.

If the P/A ratio lies between two of the numbers shown in the tables that follow, for a safe estimate, please use the P/A ratio shown that is the next highest i.e. for 0.57 use 0.6.

NB The figures quoted are for guidance only. A detailed U-value calculation should be completed for each individual project.

NB For the purposes of these calculations, using the method as detailed in BS / I.S. EN ISO 13370: 2007, the soil has been assumed to be sand or gravel, the wall insulation is assumed to overlap the floor insulation by minimum 150 / 225 mm for a concrete floor and 200 mm for a timber floor, and the standard of workmanship has been assumed good and therefore the correction factor for air gaps has been ignored.*

NB If your construction is different from those specified and / or to gain a comprehensive U-value calculation for your project please consult the Kingspan Insulation Technical Service Department for assistance (see rear cover).

U-value Table Key

Where an **x** is shown, the U-value is higher than the worst of the maximum new build area weighted average U-values allowed by the 2010 Editions of Approved Documents L to the Building Regulations (England & Wales), the 2010 Editions of Technical Handbooks Section 6 (Scotland), the 2006 Editions of Technical Booklets F (Northern Ireland), or the 2008 Editions of Technical Guidance Documents L* (Republic of Ireland).

* Excluding Change of Use and Material Alterations.

Beam and Dense* Block Ground Floors

Insulation Below the Floor Screed

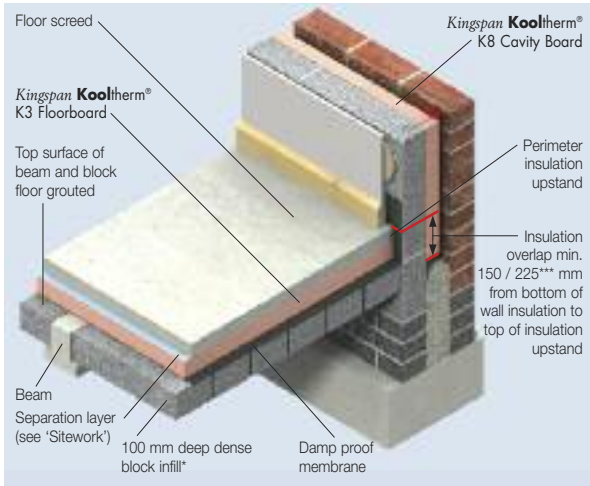


Figure 4

U-values (W/m²·K) for Various Thicknesses of Kingspan Kooltherm® K3 Floorboard and Floor Perimeter / Area Ratios

Insulant Thickness (mm)	Perimeter / Area (m ²)					
	0.2	0.3	0.4	0.5	0.6	0.7
30	X	X	X	X	X	X
40	0.24	X	X	X	X	X
50	0.21	0.23	0.25	X	X	X
60	0.19	0.21	0.22	0.23	0.23	0.24
70	0.17	0.19	0.20	0.20	0.21	0.21
75	0.17	0.18	0.19	0.19	0.20	0.20
80	0.16	0.17	0.18	0.19	0.19	0.19
90	0.15	0.16	0.17	0.17	0.17	0.18
100	0.14	0.15	0.15	0.16	0.16	0.16
110	0.13	0.14	0.14	0.15	0.15	0.15
120	0.12	0.13	0.13	0.14	0.14	0.14
125	0.12	0.12	0.13	0.13	0.13	0.13
130	0.11	0.12	0.12	0.13	0.13	0.13
140	0.11	0.11	0.12	0.12	0.12	0.12
150	0.10	0.11	0.11	0.11	0.11	0.11
80 + 80	0.10	0.10	0.10	0.11	0.11	0.11
80 + 90**	0.09	0.10	0.10	0.10	0.10	0.10

* Calculations assume dense block infill of λ -value (1.13 W/m·K)

** Where multiple layers of insulation of different thicknesses are used, the thickest layer should be installed as the outermost layer in the construction.

*** 150 mm applies to the UK and 225 mm to the Republic of Ireland.

Suspended Timber Ground Floors

Insulation Between Joists

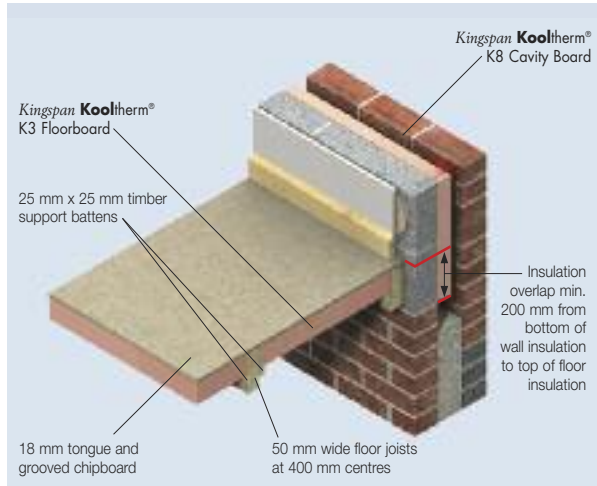


Figure 5

U-values (W/m²·K) for Various Thicknesses of Kingspan Kooltherm® K3 Floorboard and Floor Perimeter / Area Ratios

Insulant Thickness (mm)	Perimeter / Area (m ²)					
	0.2	0.3	0.4	0.5	0.6	0.7
Insulant produced at Kingspan's Pembridge facility						
50	X	X	X	X	X	X
60	0.24	X	X	X	X	X
70	0.22	0.25	X	X	X	X
75	0.22	0.24	0.25	X	X	X
80	0.21	0.23	0.25	0.25	X	X
90	0.20	0.22	0.23	0.24	0.24	0.25
100	0.19	0.20	0.21	0.22	0.23	0.23
110	0.18	0.19	0.20	0.21	0.21	0.22
120	0.17	0.18	0.19	0.20	0.20	0.20
125	0.16	0.18	0.18	0.19	0.19	0.20
130	0.16	0.17	0.18	0.18	0.19	0.19
140	0.15	0.16	0.17	0.18	0.18	0.18
150	0.15	0.16	0.16	0.17	0.17	0.17
80 + 80	0.14	0.15	0.16	0.16	0.16	0.16
80 + 90*	0.13	0.14	0.15	0.15	0.15	0.16
75 + 100***	0.13	0.14	0.15	0.15	0.15	0.15

Insulant Thickness (mm)	Perimeter / Area (m ²)					
	0.2	0.3	0.4	0.5	0.6	0.7
Insulant produced at Kingspan's Castleblayney facility						
30	0.25	X	X	X	X	X
40	0.23	X	X	X	X	X
50	0.21	0.23	0.25	X	X	X
60	0.20	0.22	0.23	0.24	0.24	0.25
70	0.19	0.20	0.21	0.22	0.22	0.23
75	0.18	0.20	0.21	0.21	0.22	0.22
80	0.18	0.19	0.20	0.21	0.21	0.21
90	0.17	0.18	0.19	0.19	0.20	0.20
100	0.16	0.17	0.18	0.18	0.19	0.19
110	0.15	0.16	0.17	0.17	0.18	0.18
120	0.14	0.15	0.16	0.16	0.17	0.17
125	0.14	0.15	0.16	0.16	0.16	0.16
130	0.14	0.15	0.15	0.16	0.16	0.16
140	0.13	0.14	0.15	0.15	0.15	0.15
150	0.13	0.14	0.14	0.14	0.14	0.15
80 + 80	0.12	0.13	0.13	0.14	0.14	0.14
80 + 90*	0.12	0.12	0.13	0.13	0.13	0.13
75 + 100***	0.12	0.12	0.13	0.13	0.13	0.13

* Where multiple layers of insulation of different thicknesses are used, the thickest layer should be installed as the outermost layer in.

** Suspended timber ground floor joists are typically 200 mm deep and, therefore, U-values have been calculated with a maximum insulation thickness of 175 mm, in order to accommodate 25 x 25 mm timber support battens.

Solid Concrete Ground Based Floors

Insulation Below the Floor Slab

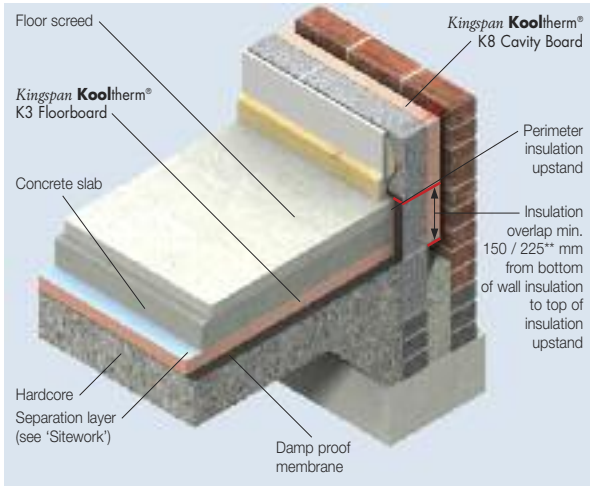


Figure 6

Insulation Below the Floor Screed

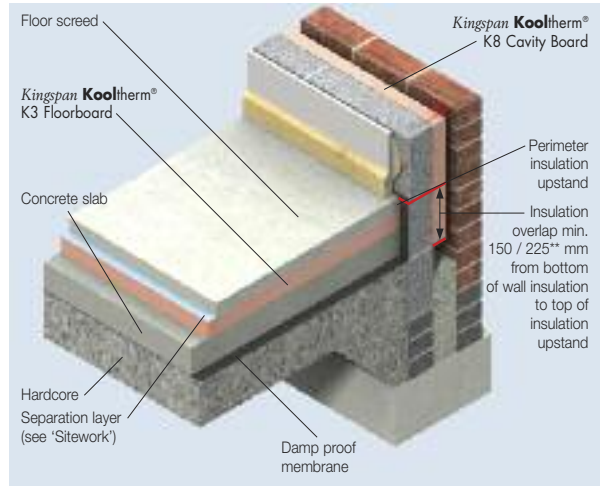


Figure 7

U-values (W/m².K) for Various Thicknesses of Kingspan Kooltherm® K3 Floorboard and Floor Perimeter / Area Ratios

Insulant Thickness (mm)	Perimeter / Area (m ²)					
	0.2	0.3	0.4	0.5	0.6	0.7
30	X	X	X	X	X	X
40	0.23	X	X	X	X	X
50	0.20	0.23	0.25	X	X	X
60	0.18	0.20	0.22	0.23	0.24	0.25
70	0.17	0.19	0.20	0.21	0.22	0.22
75	0.16	0.18	0.19	0.20	0.21	0.21
80	0.15	0.17	0.18	0.19	0.20	0.20
90	0.14	0.16	0.17	0.17	0.18	0.18
100	0.13	0.15	0.15	0.16	0.16	0.17
110	0.12	0.14	0.14	0.15	0.15	0.15
120	0.12	0.13	0.13	0.14	0.14	0.14
125	0.11	0.12	0.13	0.13	0.14	0.14
130	0.11	0.12	0.12	0.13	0.13	0.13
140	0.10	0.11	0.12	0.12	0.12	0.12
150	0.10	0.11	0.11	0.11	0.12	0.12
80 + 80	0.09	0.10	0.11	0.11	0.11	0.11
80 + 90*	0.09	0.10	0.10	0.10	0.10	0.11
75 + 100*	0.09	0.09	0.10	0.10	0.10	0.10

* Where multiple layers of insulation of different thicknesses are used, the thickest layer should be installed as the outermost layer in the construction.

**150 mm applies to the UK and 225 mm to the Republic of Ireland.

U-values (W/m².K) for Various Thicknesses of Kingspan Kooltherm® K3 Floorboard and Floor Perimeter / Area Ratios

Insulant Thickness (mm)	Perimeter / Area (m ²)					
	0.2	0.3	0.4	0.5	0.6	0.7
30	X	X	X	X	X	X
40	0.23	X	X	X	X	X
50	0.20	0.23	0.25	X	X	X
60	0.18	0.20	0.22	0.23	0.24	0.25
70	0.17	0.19	0.20	0.21	0.22	0.22
75	0.16	0.18	0.19	0.20	0.21	0.21
80	0.15	0.17	0.18	0.19	0.20	0.20
90	0.14	0.16	0.17	0.17	0.18	0.18
100	0.13	0.15	0.15	0.16	0.16	0.17
110	0.12	0.14	0.14	0.15	0.15	0.15
120	0.12	0.13	0.13	0.14	0.14	0.14
125	0.11	0.12	0.13	0.13	0.14	0.14
130	0.11	0.12	0.12	0.13	0.13	0.13
140	0.10	0.11	0.12	0.12	0.12	0.12
150	0.10	0.11	0.11	0.11	0.12	0.12
80 + 80	0.09	0.10	0.11	0.11	0.11	0.11
80 + 90*	0.09	0.10	0.10	0.10	0.10	0.11
75 + 100*	0.09	0.09	0.10	0.10	0.10	0.10

* Where multiple layers of insulation of different thicknesses are used, the thickest layer should be installed as the outermost layer in the construction.

**150 mm applies to the UK and 225 mm to the Republic of Ireland.

Design Considerations

Environmental Impact & Responsible Sourcing

Green Guide Rating

An Ecoprofile, certified by BRE Certification to the 2008 BRE Environmental Profiles Methodology, has been created for **Kingspan Kooltherm® K3 Floorboard** produced at Kingspan Insulation's Pembroke manufacturing facility. The BRE has assigned the product a 2008 Green Guide Summary Rating of A+.



Environmental Profiles Scheme
Certificate Number ENP 410

Responsible Sourcing

Kingspan Kooltherm® K3 Floorboard produced at Kingspan Insulation's Pembroke and Castleblayney manufacturing facilities is manufactured under a management system certified to BS / I.S. EN ISO 14001: 2004. The principle polymer component of the product produced at these facilities is also manufactured under a management system certified to BS EN ISO 14001: 2004.

NB The above information is correct at the time of writing. Please confirm at the point of need by contacting Kingspan Insulation's Technical Service Department (see rear cover), from which copies of Kingspan Insulation and its suppliers' ISO 14001 certificates can be obtained along with confirmation of Kingspan Insulation's products' Green Guide ratings.

Sustainability & Responsibility

Kingspan Insulation has a long-term commitment to sustainability and responsibility: as a manufacturer and supplier of insulation products; as an employer; as a substantial landholder; and as a key member of its neighbouring communities.

A report covering the sustainability and responsibility of Kingspan Insulation Ltd's British operations is available at www.kingspaninsulation.co.uk/sustainabilityandresponsibility.

Specification Clause

Kingspan Kooltherm® K3 Floorboard should be described in specifications as:-

The floor insulation shall be **Kingspan Kooltherm® K3 Floorboard** ____ mm thick: comprising a premium performance rigid thermoset insulation core faced on both sides with a flexible facing. The product shall be manufactured: with a blowing agent that has zero Ozone Depletion Potential (ODP) and low Global Warming Potential (GWP); under a management system certified to BS / I.S. EN ISO 9001: 2008, BS / I.S. EN ISO 14001: 2004 and BS / I.S. OHSAS 18001: 2007; by Kingspan Insulation Limited; and installed in accordance with the instructions issued by them.

NBS Specifications

Details also available in NBS Plus.

NBS users should refer to clause(s):

E20 200, M10 290, M13 260

(Standard and Intermediate)

E20 30 (Minor Works)



Design Standards

Consideration should be given to the recommendations of BS 8102: 1990 (Code of practice for protection of buildings against water from the ground), BS 8215: 1991 (Code of practice for design and installation of damp proof courses in masonry construction), and the information given in Building Research Establishment Digest 104 (Floor Screeds).

Compressive Loads

Un-reinforced floor screeds can be used in conjunction with **Kingspan Kooltherm® K3 Floorboard** in most applications. The compressive strength of **Kingspan Kooltherm® K3 Floorboard** offers considerable advantages over some other floor insulants. Providing a minimum compressive strength of 120 kPa at 10% compression allows greater floor loads to be considered and therefore additional scope in the use of **Kingspan Kooltherm® K3 Floorboard**. However, where floor loads are to be excessive, consideration should be given to the use of **Kingspan Styrozone®** extruded polystyrene insulation which has greater compressive strength. For further information please contact the Kingspan Insulation Technical Service Department (see rear cover).

Substrate

Kingspan Kooltherm® K3 Floorboard is not recommended for use in direct contact with subsoil and must be used over a DPM.

Lightning Protection

Building designers should give consideration to the requirements of BS / I.S. EN 62305: 2006 (Protection against lightning).

Underfloor Heating Systems

The constructions shown in the Typical Constructions and U-values section can be readily converted to accommodate underfloor heating systems.

For a solid concrete floor, the position of the insulation is important in either exposing the thermal mass of the concrete floor to the heat provided by the system, or isolating the thermal mass from it.

For a 24 hour heating cycle, allowing the heat from the underfloor heating system to penetrate the concrete slab will provide a more even heating regime over a 24 hour period (Figure 8).

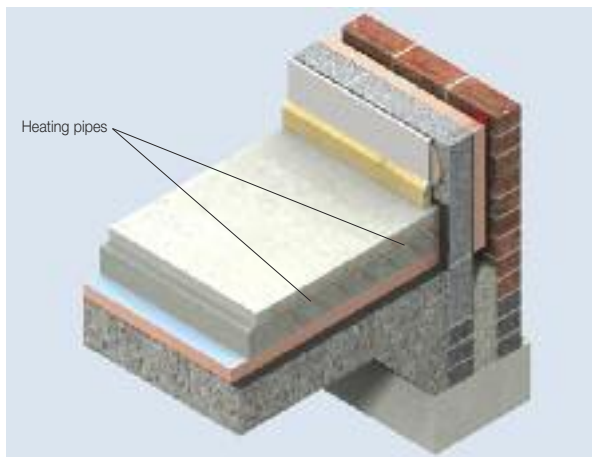


Figure 8 – 24 Hour Heating Application – Below the Floor Slab

For intermittent heating applications, where a fast response time is required, it is beneficial to have less thermal mass available to take up heat from the system and so placing the insulation layer below the screed but above the concrete slab (Figure 9) or beam and block floor (Figure 10) is the best solution.

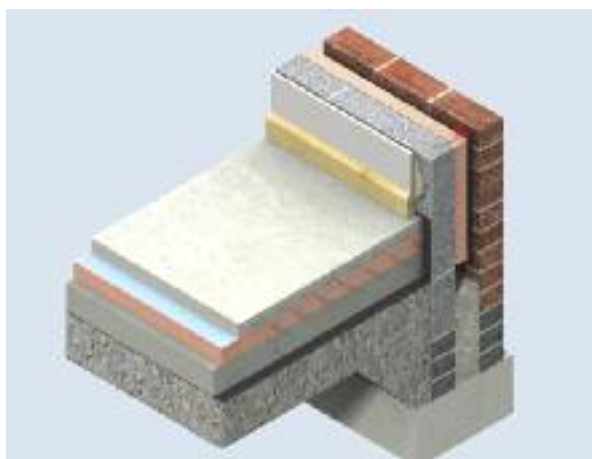


Figure 9 – Intermittent Heating Applications – Below the Floor Screed

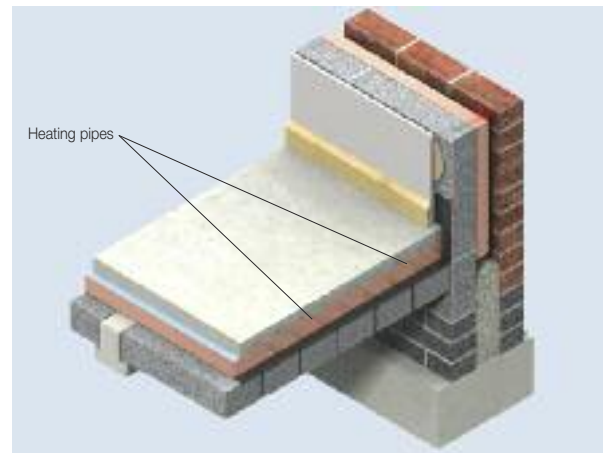


Figure 10 – Intermittent Heating Applications – Beam and Block Floor

Underfloor heating systems can also be accommodated in suspended timber floors. This arrangement has low thermal mass and so is more suited to intermittent heating applications (Figure 11).

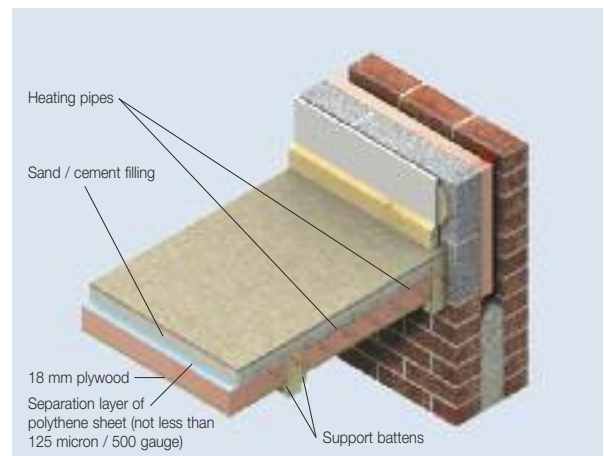


Figure 11 – Intermittent Heating Applications – Suspended Timber Floor

Sitework

Installation Below a Floor Slab

- The site should be prepared and foundations, where appropriate, built to damp proof course (DPC) level.
- A thin sand blinding may be used to achieve a continuous level surface free from projections over rolled hardcore.
- The damp proof membrane (minimum 300 micron / 1200 gauge polythene) should be laid with joints well lapped and folded, to prevent the passage of ground water, over well compacted hardcore, prior to laying the insulation boards.
- The membrane should be brought up the surrounding foundation walls until it is sufficiently above the height of the wall DPC so that it will connect with or form the DPC.
- The insulation boards should always be loose-laid break-bonded, with joints lightly butted.
- If two layers of insulation are required, they should be horizontally offset relative to each other so that, as far as possible, the board joints in the two adjacent layers do not coincide with each other (see Figure 12).

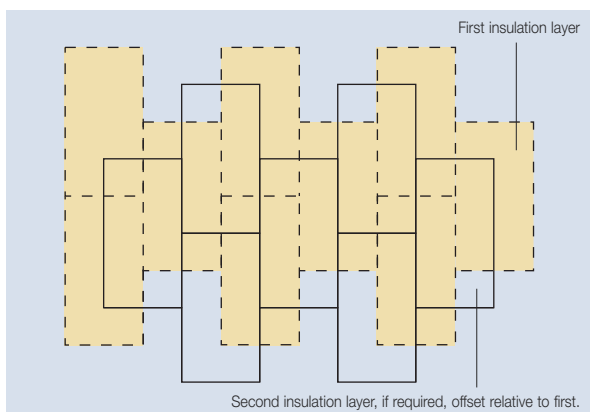


Figure 12 Offsetting of Multiple Insulation Layers

- A strip of the insulation board (minimum 20 mm thick) should be placed vertically around the perimeter of the floor slab in order to prevent cold bridging. The top of the strip of insulation board should be level with the top of the floor screed and the bottom should be level with the bottom of the horizontal floor insulation, and be closely butted up to it.
- Insulation boards should be overlaid with a polythene sheet (not less than 125 micron / 500 gauge), to prevent the wet concrete penetrating the joints between the boards, and to act as a vapour control layer. Ensure the polythene sheet has 150 mm overlaps, taped at the joints, and is turned up 100 mm at the walls.
- The subsequent installation of the concrete slab and screed or other flooring material is carried out in a manner similar to that for an un-insulated floor. The concrete slab and screed should be allowed to dry out prior to the installation of the floor finish.

Installation Below a Floor Screed

- Concrete slabs should be allowed to dry out fully prior to the installation of the insulation boards (average 1 day per mm of slab thickness).
- The surface of the slab should be smooth, flat and free from projections. Beam and block floors should be level and grouted. Rough cast slabs should be levelled using a thin sand blinding to ensure boards are continuously supported.
- The damp proof membrane (minimum 300 micron / 1200 gauge polythene) should be laid with joints well lapped and folded, to prevent the passage of ground water, over the concrete floor slab, or beam and block floor prior to laying the insulation boards.
- The membrane should be brought up the surrounding foundation walls until it is sufficiently above the height of the wall DPC so that it will connect with or form the DPC.
- The insulation boards should always be loose-laid break-bonded, with joints lightly butted.
- If two layers of insulation are required, they should be horizontally offset relative to each other so that, as far as possible, the board joints in the two adjacent layers do not coincide with each other (see Figure 12).
- A strip of the insulation board (minimum 20 mm thick) should be placed vertically around the perimeter of the floor slab in order to prevent cold bridging. The top of the strip of insulation board should be level with the top of the floor screed and the bottom should be level with the bottom of the horizontal floor insulation, and closely butted up to it.
- Insulation boards should be overlaid with a polythene sheet (not less than 125 micron / 500 gauge), to prevent the wet screed penetrating the joints between the boards, and to act as a vapour control layer. Ensure the polythene sheet has 150 mm overlaps, taped at the joints, and is turned up 100 mm at the walls.
- Use sand and cement screed laid to a minimum thickness of 65 mm for domestic construction and 75 mm elsewhere.

Installation in a Suspended Timber Floor

Installation from Above the Floor Joists

- The installation of *Kingspan Kooltherm*® K3 Floorboard in suspended floor constructions should be carried out before commencement of floor boarding.
- The insulation boards should be cut to fit snugly between the floor joists. Measure the distance between the joists prior to cutting the boards as spacings can vary.
- In order to ensure insulation boards are flush with the top surface of the joists, they should be supported on minimum 25 mm x 25 mm treated softwood timber battens, proprietary galvanised steel saddle clips, or galvanised nails partially driven into the side of the joists.

- Battens / nails should be placed at an appropriate height to suit the thickness of board being fitted, and nails should remain 40 mm proud of the joist.
- The insulation boards should then be fitted between the joists so that they are supported by the battens / saddle clips or nails.
- If two layers of insulation are required, they should be horizontally offset relative to each other so that, as far as possible, the board joints in the two adjacent layers do not coincide with each other.
- All board joints should be tightly butted.
- Ensure that insulation boards are fitted tightly between joists, and any gaps are filled with expanding urethane sealant.
- Any narrow gaps between a joist and perimeter wall should be insulated by specially cut pieces of board which in turn should be supported on blocks nailed to the underside of the joists. Gaps less than 25 mm wide should be filled with expanding urethane sealant.
- **Kingspan Kooltherm® K3 Floorboard** is not suitable for installation directly over timber joists.

Installation from Below the Floor Joists

- Floor boards should be fixed over joists prior to fitting **Kingspan Kooltherm® K3 Floorboard** from below.
- The insulation boards should be cut to fit snugly between the floor joists. Measure the distance between the joists prior to cutting the boards as spacings can vary.
- Push the cut insulation boards between the joists so they are flush with the underside of the floor boards.
- If two layers of insulation are required, they should be horizontally offset relative to each other so that, as far as possible, the board joints in the two adjacent layers do not coincide with each other.
- All board joints should be tightly butted.
- Ensure that insulation boards are fitted tightly between joists, and any gaps are filled with expanding urethane sealant.
- Side-nail 25 mm x 25 mm timber battens to the joists or partially drive galvanised nails into the side of the joists in the appropriate position to hold the boards in place.
- Any narrow gaps between a joist and perimeter wall should be insulated by specially cut pieces of board which in turn should be supported on blocks nailed to the underside of the joists. Gaps less than 25 mm wide should be filled with expanding urethane sealant.

Wheeled / Foot Traffic

- Ensure boards are protected during installation from wheeled / foot traffic by using scaffold planks or other protective measures.

Underfloor Heating Systems

- Please refer to the instructions of the specific underfloor heating system manufacturer.

General

Cutting

- Cutting should be carried out either by using a fine toothed saw, or by scoring with a sharp knife, snapping the board over a straight edge and then cutting the facing on the other side.
- Ensure accurate trimming to achieve close-butting joints and continuity of insulation.

Availability

- **Kingspan Kooltherm® K3 Floorboard** is available through specialist insulation distributors and selected builders' merchants throughout the UK and Ireland.

Packaging and Storage

- The polyethylene packaging of Kingspan Insulation products, which is recyclable, should not be considered adequate for outdoor protection.
- Ideally, boards should be stored inside a building. If, however, outside storage cannot be avoided, then the boards should be stacked clear of the ground and covered with an opaque polythene sheet or weatherproof tarpaulin. Boards that have been allowed to get wet should not be used.

Health and Safety

- Kingspan Insulation products are chemically inert and safe to use.
- A Safety Information Data Sheet for this product is available from the Kingspan Insulation website www.kingspaninsulation.co.uk/safety or www.kingspaninsulation.ie/safety.

Warning – do not stand on or otherwise support your weight on this product unless it is fully supported by a load bearing surface.

Please note that the reflective surface on this product (produced at Kingspan Insulation's Castleblayney manufacturing facility) is designed to enhance its thermal performance. As such, it will reflect light as well as heat, including ultraviolet light. Therefore, if this board is being installed during very bright or sunny weather, it is advisable to wear UV protective sunglasses or goggles, and if the skin is exposed for a significant period of time, to protect the bare skin with a UV block sun cream.

The reflective facing used on this product (produced at Kingspan Insulation's Castleblayney manufacturing facility) can be slippery underfoot when wet. Therefore, it is recommended that any excess material should be contained to avoid a slip hazard.

Product Details

The Facings

Kingspan Kooltherm® K3 Floorboard produced at Kingspan Insulation's Pembridge manufacturing facility is faced on both sides with a glass tissue based facing, autohesively bonded to the insulation core during manufacture. That produced at Kingspan Insulation's Castleblayney manufacturing facility is faced with a composite foil facing, similarly bonded.

The Core

The core of *Kingspan Kooltherm*® K3 Floorboard is a premium performance rigid thermoset modified resin insulant manufactured with a blowing agent that has zero Ozone Depletion Potential (ODP) and low Global Warming Potential (GWP).



Standards and Approvals

Kingspan Kooltherm® K3 Floorboard is manufactured to the highest standards under a management system certified to BS / I.S. EN ISO 9001: 2008 (Quality management systems. Requirements), BS / I.S. EN ISO 14001 : 2004 (Environmental Management Systems. Requirements) and BS / I.S. OHSAS 18001: 2007 (Health and Safety Management Systems. Requirements).

The use of *Kingspan Kooltherm*® K3 Floorboard produced at Kingspan Insulation's Pembridge manufacturing facility is covered by BBA Certificate 08/4522, and that produced at Kingspan Insulation's Castleblayney manufacturing facility by IAB Certificate 09/0329.



Standard Dimensions

Kingspan Kooltherm® K3 Floorboard is available in the following standard size(s):

Nominal Dimension	Availability
Length (m)	2.4 (1.2)
Width (m)	1.2 (0.6)
Insulant Thickness (mm)	Refer to local distributor or Kingspan Insulation price list for current stock and non-stock sizes.

Compressive Strength

The compressive strength of *Kingspan Kooltherm*® K3 Floorboard typically exceeds 120 kPa at 10% compression, when tested to BS / I.S. EN 826: 1996 (Thermal insulating products for building applications. Determination of compression behaviour).

Water Vapour Resistivity

Kingspan Kooltherm® K3 Floorboard produced at Kingspan Insulation's Pembridge manufacturing facility typically achieves a resistivity greater than 300 MN-s/g-m when tested in accordance with BS EN 12086: 1997 / I.S. EN 12086: 1998 (Thermal insulating products for building applications Determination of water vapour transmission properties).

Adjusted for the effect of board joints, the product produced at Kingspan Insulation's Castleblayney manufacturing facility achieves a resistance far greater than 100 MN-s/g when tested in accordance with the above standard.

Durability

If correctly installed, *Kingspan Kooltherm*® K3 Floorboard can have an indefinite life. Its durability depends on the supporting structure and the conditions of its use.

Resistance to Solvents, Fungi & Rodents

The insulation core is resistant to short-term contact with petrol and with most dilute acids, alkalis and mineral oils. However, it is recommended that any spills be cleaned off fully before the boards are installed. Ensure that safe methods of cleaning are used, as recommended by the suppliers of the spilt liquid. The insulation core is not resistant to some solvent-based adhesive systems, particularly those containing methyl ethyl ketone. Adhesives containing such solvents should not be used in association with this product. Damaged boards or boards that have been in contact with harsh solvents or acids should not be used.

The insulation core and facings used in the manufacture of *Kingspan Kooltherm*® K3 Floorboard resist attack by mould and microbial growth, and do not provide any food value to vermin.

Fire Performance

Kingspan Kooltherm® K3 Floorboard produced at Kingspan Insulation's Pembridge manufacturing facility, and its rigid thermoset insulation core, are Class 0, as defined by the Building Regulations.

Kingspan Kooltherm® K3 Floorboard produced at Kingspan Insulation's Castleblayney manufacturing facility is Class 1, as defined by BS 476-7: 1997 (Fire tests on building materials and structures. Method of test to determine the classification of the surface spread of flame of products).

The rigid thermoset insulation core of *Kingspan Kooltherm*® K3 Floorboard produced at Kingspan Insulation's Castleblayney manufacturing facility is Class 0, as defined by the Building Regulations.

The rigid thermoset insulation core of *Kingspan Kooltherm*® K3 Floorboard, when subjected to the British Standard fire test specified in the table below, has achieved the result shown.

Test	Result
BS 5111-1: 1974 (Smoke Obscuration)	< 5% (Negligible smoke obscuration)

Further details on the fire performance of Kingspan Insulation products may be obtained from the Kingspan Insulation Technical Service Department (see rear cover).

Thermal Properties

The λ -values and R-values detailed below are quoted in accordance with BS /I.S. EN 13166: 2008 (Thermal insulation products for buildings – Factory made products of phenolic foam (PF) – Specification).

Thermal Conductivity

The boards achieve a thermal conductivity (λ -value) of:
 0.023 W/m·K (insulant thickness 15–24 mm);
 0.021 W/m·K (insulant thickness 25–44 mm); and
 0.020 W/m·K (insulant thickness \geq 45 mm).

Thermal Resistance

Thermal resistance (R-value) varies with thickness and is calculated by dividing the thickness of the board (expressed in metres) by its thermal conductivity. The resulting number is rounded down to the nearest 0.05 (m²·K/W).

Insulant Thickness (mm)	Thermal Resistance (m ² ·K/W)
20	0.85
25	1.15
30	1.40
40	1.90
50	2.50
60	3.00
70	3.50
75	3.75
80	4.00
90	4.50
100	5.00
110	5.50
120	6.00
125	6.25
130	6.50
140	7.00
150	7.50

NB Refer to local distributor or Kingspan Insulation price list for current stock and non-stock sizes.

Kingspan Insulation

Company Details

Kingspan Insulation Ltd is part of the Kingspan Group plc., one of Europe's leading construction product manufacturers. The Kingspan Group was formed in the late 1960s and is a publicly quoted group of companies headquartered in Kingscourt, County Cavan, Ireland.

Kingspan Insulation Ltd is a market leading manufacturer of premium and high performance rigid insulation products and insulated systems for building fabric and building services applications.

Products & Applications

Kingspan Insulation Ltd has a vast product range. Kingspan Insulation Ltd products are suitable for both new build and refurbishment in a variety of applications within both domestic and non-domestic buildings.

Insulation for:

- Pitched Roofs
- Flat Roofs
- Green Roofs
- Cavity Walls
- Solid Walls
- Timber and Steel Framing
- Insulated Cladding Systems
- Insulated Render Systems
- Floors
- Soffits
- Ductwork

Further Solutions:

- Insulated Dry-Lining
- Tapered Roofing Systems
- Cavity Closers
- **Kingspan KoolDuct**® Pre-Insulated Ducting
- **Kingspan nilventi**® Breathable Membranes
- **Kingspan TEK**® Building System

Insulation Product Benefits

Kingspan Kooltherm® K-range Products

- With a thermal conductivity of 0.020–0.023 W/m·K these are the most thermally efficient insulation products commonly used.
- The thinnest commonly used insulation products for any specific U-value.
- Rigid thermoset insulation core is Class 0, as defined by the Building Regulations in England, Wales & Ireland, and Low Risk, as defined by the Building Standards in Scotland.
- Rigid thermoset insulation core achieves the best possible rating of < 5% smoke obscuration when tested to BS 5111: Part 1: 1974.
- Manufactured with a blowing agent that has zero Ozone Depletion Potential (ODP) and low Global Warming Potential (GWP).

Kingspan Therma™ Range Products

- With a thermal conductivity of 0.022–0.027 W/m·K these are amongst the more thermally efficient insulation products commonly used.
- Each product achieves the required fire performance for its intended application.
- Manufactured with a blowing agent that has zero Ozone Depletion Potential (ODP) and low Global Warming Potential (GWP).

Kingspan Styrozone® Range Products

- Rigid extruded polystyrene insulation (XPS) has the necessary compressive strength to make it the product of choice for specialist applications such as heavy duty flooring, car park decks and inverted roofing.
- Each product achieves the required fire performance for its intended application.
- Manufactured with a blowing agent that has zero Ozone Depletion Potential (ODP).

All Products

- Their closed cell structure resists both moisture and water vapour ingress – a problem which can be associated with open cell materials such as mineral fibre and which can result in reduced thermal performance.
- Unaffected by air infiltration – a problem that can be experienced with mineral fibre and which can reduce thermal performance.
- Safe and easy to install – non-fibrous.
- If installed correctly, can provide reliable long term thermal performance over the lifetime of the building.

Contact Details

Customer Service

For quotations, order placement, details of despatches and general enquiries.

Tel: +353 (0) 42 979 5000

Fax: +353 (0) 42 975 4299

email: info@kingspaninsulation.ie

Technical Advice / Design

Kingspan Insulation supports all of its products with a comprehensive Technical Advisory Service for specifiers, stockists and contractors.

Tel: +353 (0) 42 975 4297

Fax: +353 (0) 42 975 4296

email: technical@kingspaninsulation.ie



Kingspan Insulation Ltd
Castleblayney, County Monaghan, Ireland
Pembridge, Leominster, Herefordshire HR6 9LA, UK

www.kingspaninsulation.co.uk www.kingspaninsulation.ie

® Kingspan, KoolDuct, Kooltherm, nilvent, Styrozone, TEK, the oz Device and the Lion Device are Registered Trademarks of the Kingspan Group plc in the UK, Ireland and other countries. All rights reserved.

Registered in England & Wales, No. 01882722. Registered Office: Pembridge, Leominster, Herefordshire HR6 9LA, UK. VAT GB428602456.
Registered in Ireland, No. 152775. Registered Office: Bree Industrial Estate, Castleblayney, Co. Monaghan, Ireland. VAT IE6550175J.